


### What would you benefit from working with us?

- \*Feasibility and flexibility for various demands for different lengths, designs, lumen outputs, etc.
- \*Robust quality, quick installation, easy maintenance, saving time and labor costs.
- \*Long lifespan using LEDs and control gears like SAMSUNG, LG, OSRAM, TRIDONIC, PHILIPS, etc.
- \*Ability to develop other linear lighting fixtures based on clients' actual demands.



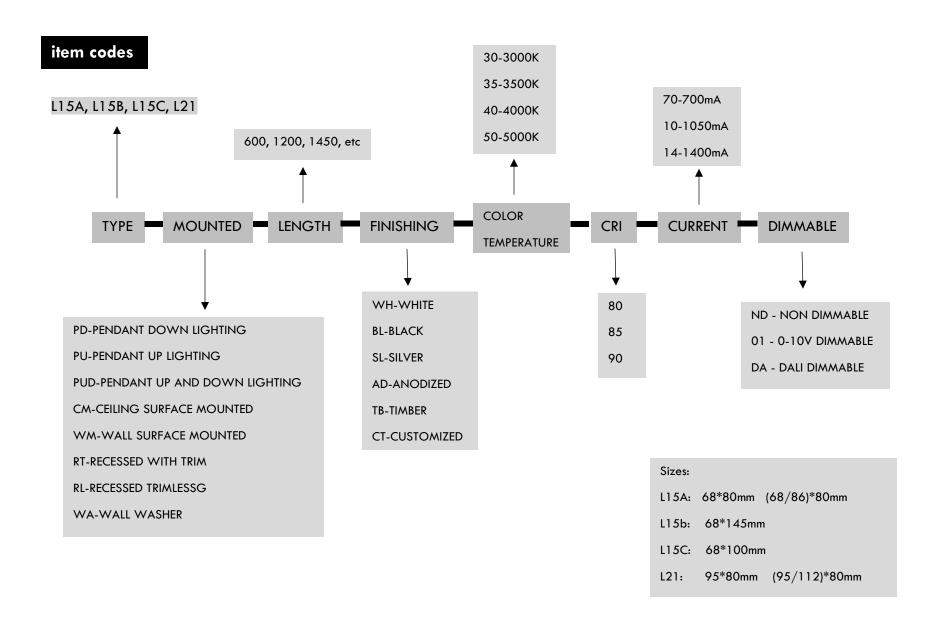

## Wattages and lumen outputs


Please note:


Based on fitting length @ 600mm

This is system output @ stable status, not initial output from LEDs.


constant current		700mA		1050mA		1400	1400mA	
item		wattage w	lumen output Im	wattage w	lumen output Im	wattage w	lumen output Im	
L15a	(68*80mm)	11	770	17	1,155	22	1,540	
L15b	(68*145mm)	22	1,540	33	2,310	44	3,080	
L1 <i>5</i> c	(68*100mm)	22	1,540	33	2,310	44	3,080	
L21	(95*80mm)	11	770	17	1,155	22	1,540	
L21	(95*80mm)	22	1,540	33	2,310	44	3,080	
L21 wall washer (95*80mm)		11	1,100	17	1,650	22	2,200	


### **Pendant lights**

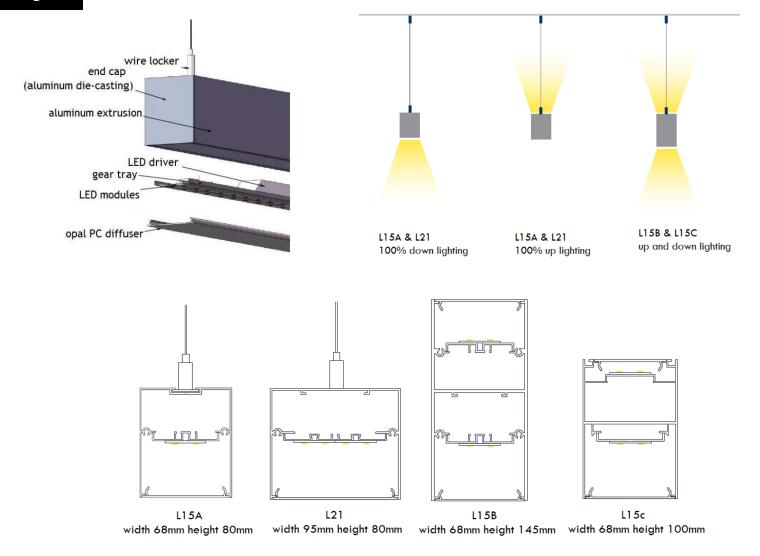


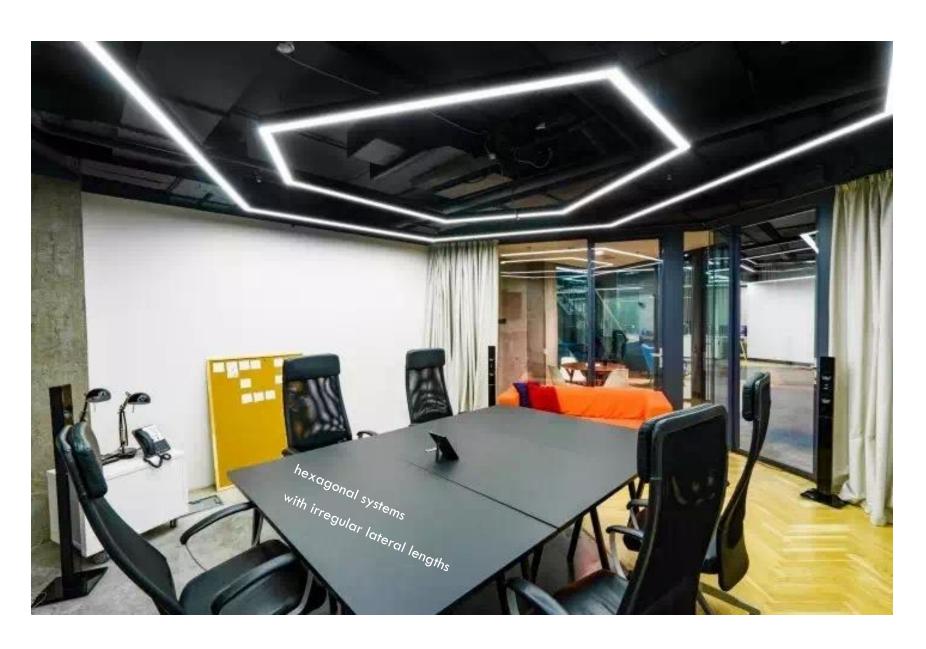


# **Surface mounted lights** (ceiling and wall surface mounted)



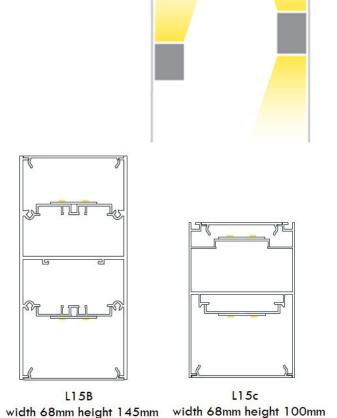




L15A width 68mm height 80mm




width 95mm height 80mm

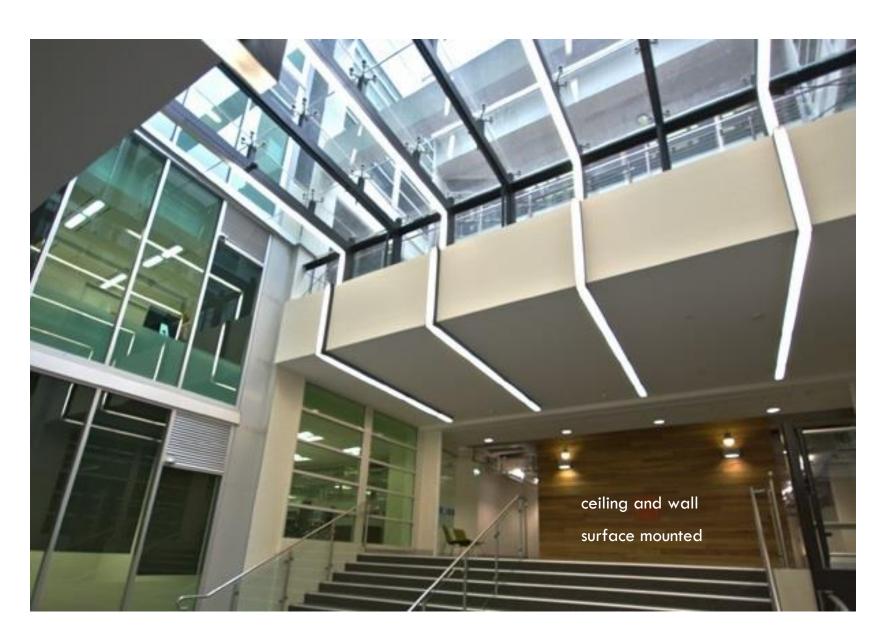





# Recessed lights With trim and trimless

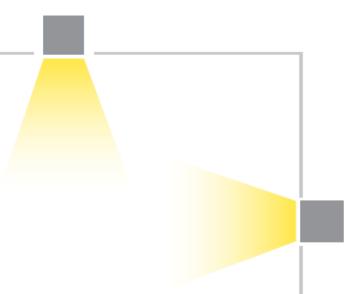







L15A recessed with trim width excluding trim size:68mm width including trim size:86mm height 80mm




L15A recessed trimless width:68mm height 80mm



L21 recessed with trim
width excluding trim size:95mm
width including trim size:112mm
height 80mm




L21 recessed trimless width:68mm height 80mm

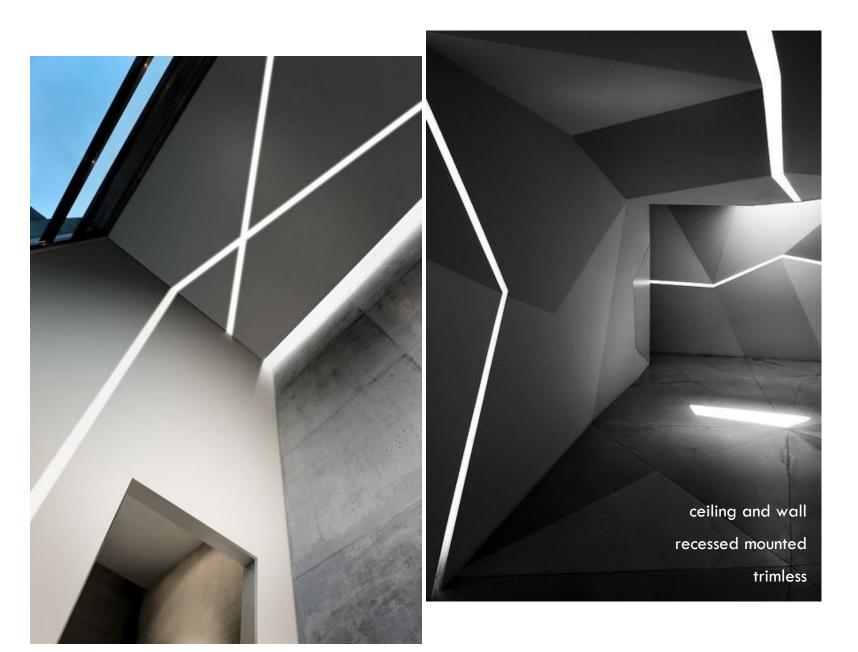


# Recessed wall washer With trim and trimless

wall washer



L21 recessed with trim width excluding trim size:95mm width including trim size:112mm height 80mm

#### wall washer




L21 recessed trimless width:68mm height 80mm





# Connecting joints

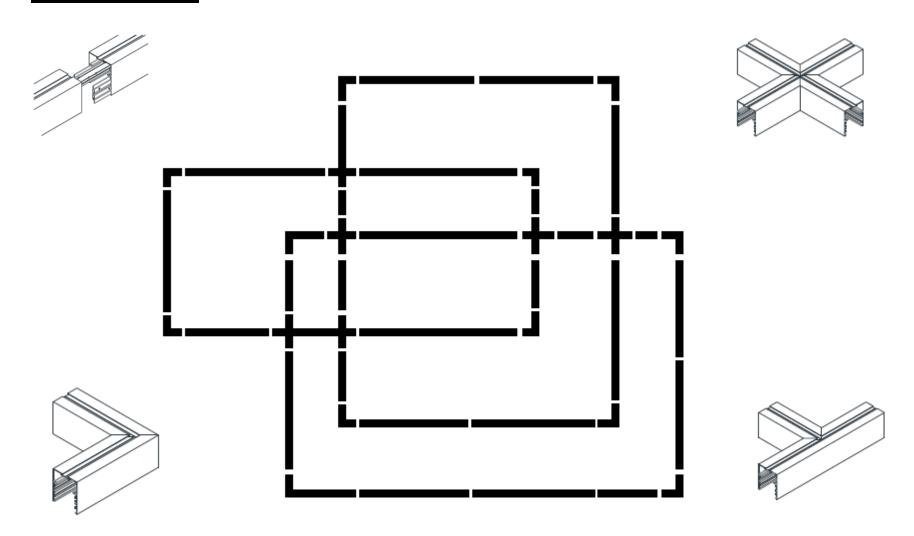

LINEAR JOINTS

L JOINTS


Y JOINTS

T JOINTS


X JOINTS


Or other special joints


Developed on actual demands

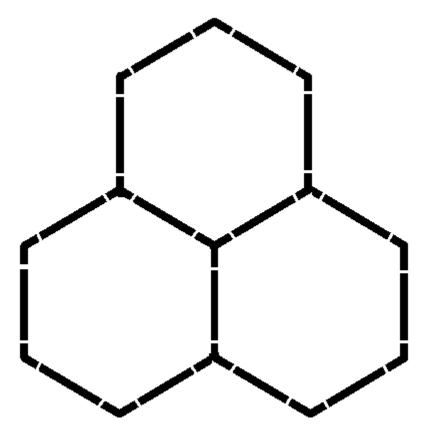


Sizes of the joints are subject to entire lighting system.

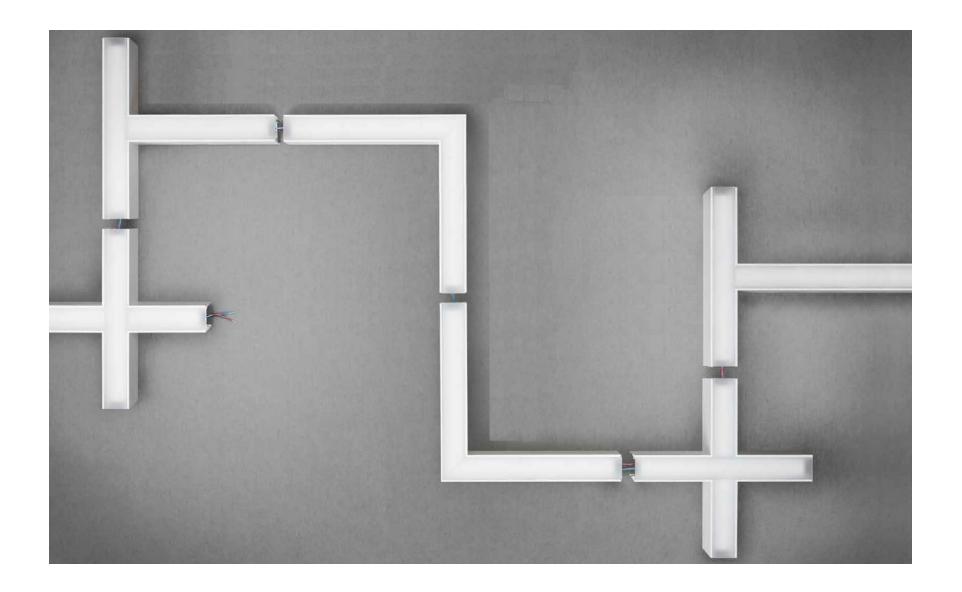


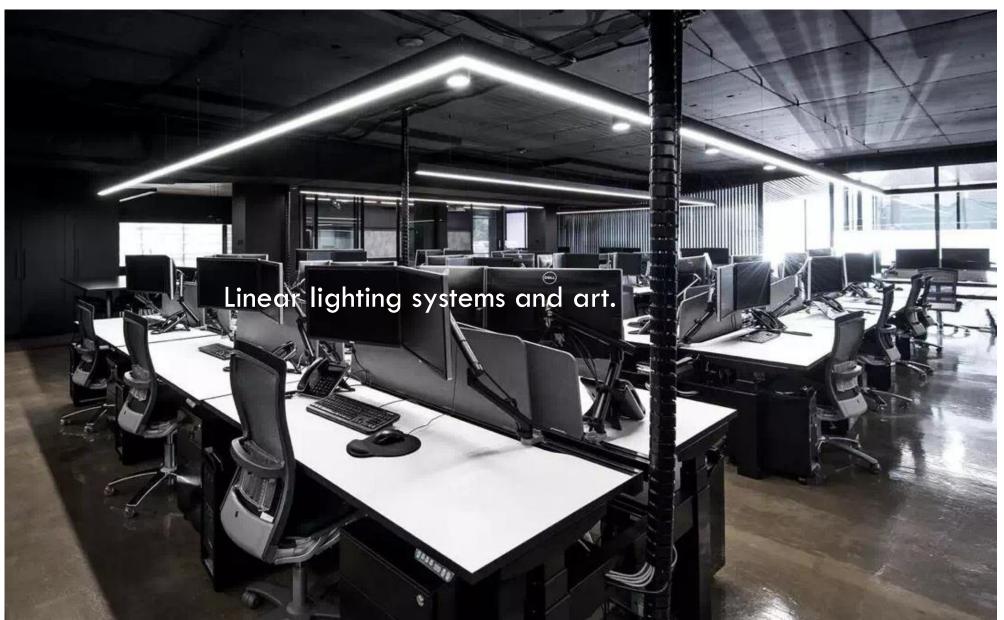

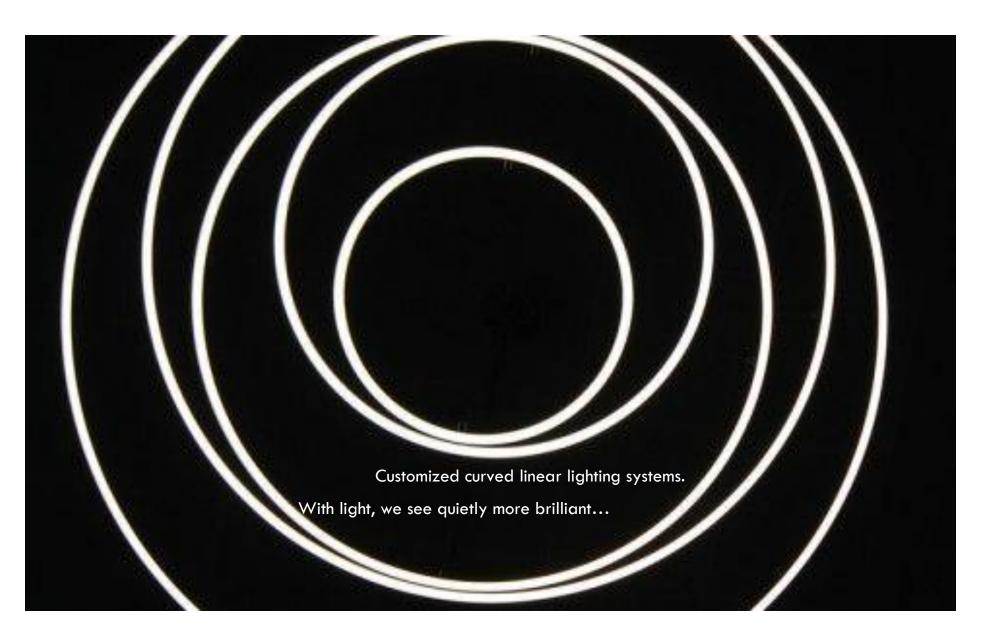

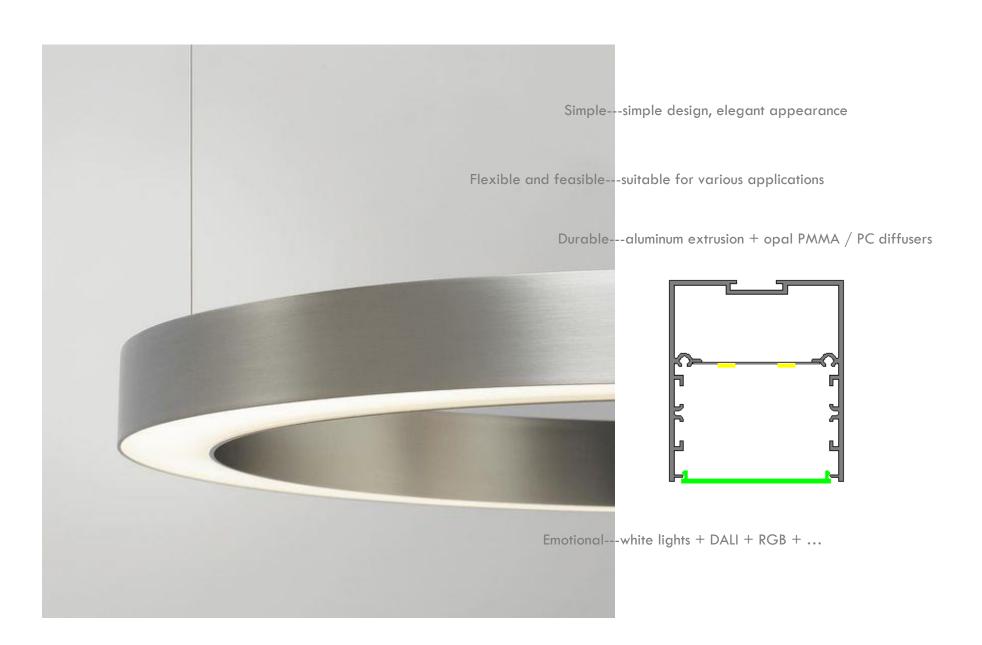









Pendant

Surface mounted

Recessed (with trim & trimless)

Customized diameter







RGB+DALI
Not limited to warm white & cool white...


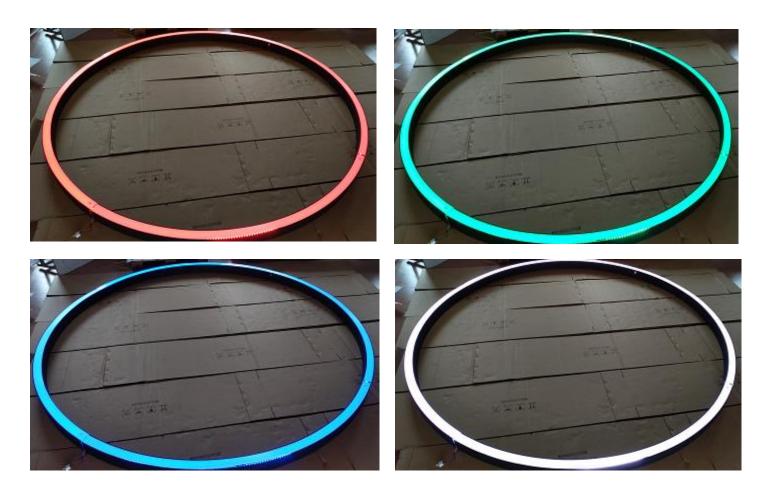


image	description	diameter mm	driving current mA	system wattage w	system lumen output Im
	LED circular ring light  aluminum profile opal PMMA diffuser  pendant surface mounted recessed  3000k/4000k white/black/silver				




### Why our products deserve your purchasing?

Reason 1: More reasonable structure




With our solution, when you need to replace the light source, you just need simply use the air-sucker to take out the diffuser, this helps you save a lot of time and labor costs.

See images below:



sliding diffuser into profile (competitors' solution)

In this solution, before you change the light source, you have to completely dis-assemble the lighting fixture completely, too complicated and labor costs are too high.





Reason 2: curved LED modules, mounted onto gear tray:



Reason 3: Gear tray is easy to install onto and convenient to take out from aluminum extrusion, at the advantage of special clips as below:





Reason 4: Gaps between extrusions, and gaps between diffusers, are minimized:



